

Trinias C16 *unity edition*

Digital Angiography System

Crossover Angiography System

Trinias C16 *unity edition*
Digital Angiography System






Based on our many years of experience, Shimadzu has added the latest advancements in imaging technology to our Trinias system to achieve top-quality patient care in interventional procedures.

The result is a patient-centered experience, leaving operators free from worry so they can easily perform all types of interventional procedures. Trinias unity edition sets the bar high with improved functionality with new hardware and software features that provide a simple workflow for cardiac and vascular procedures from head to toe. The system uses Intelligent Design to provide Intelligent Care in minimally invasive procedures. Our technology provides solution to the imaging problems that you face every day.

※unity = unlimited intelligent technology

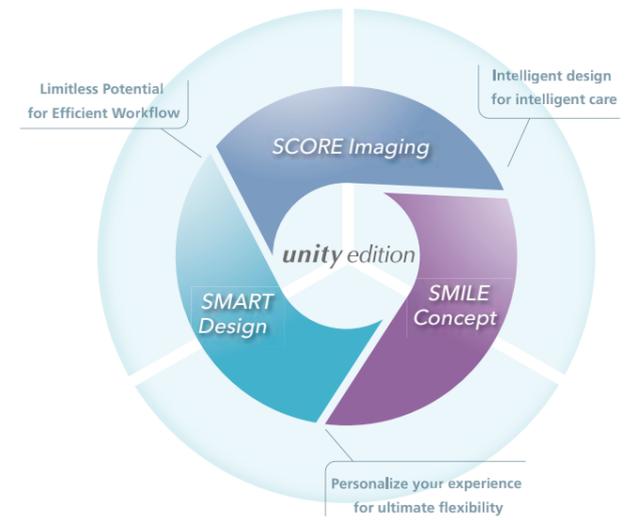

SCORE Imaging

Taking Minimally Invasive Procedures to New Levels





SCORE PRO Advance

Equipped with advanced functionality for motion tracking noise reduction, and object isolation-based enhancement, the SCORE PRO Advance image processing unit was designed to achieve lower exposure levels and higher image quality.

Shimadzu's real-time image processing technology can isolate fine blood vessels, such as peripheral vessels during interventional radiography (IVR) procedures, by enhancing only the target object without sacrificing image quality or increasing exposure dose.

Consequently, Shimadzu supports advanced interventional procedures with even higher quality images.

SCORE PRO $\frac{1}{2}$ DOSE
Advance

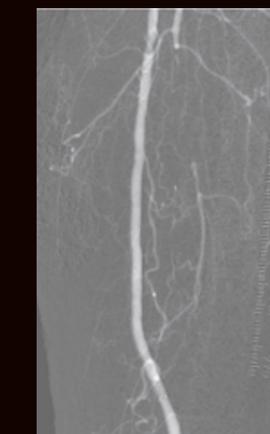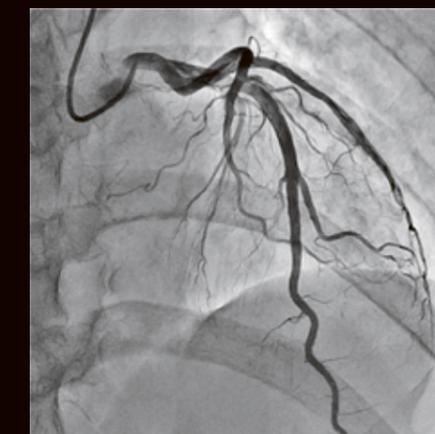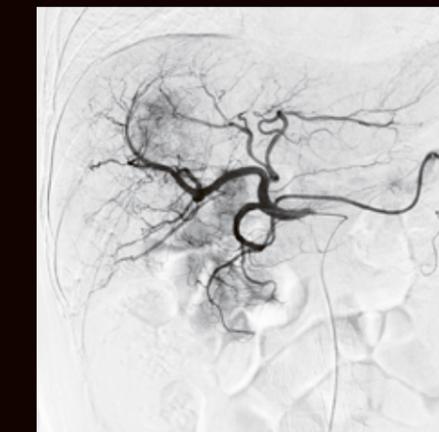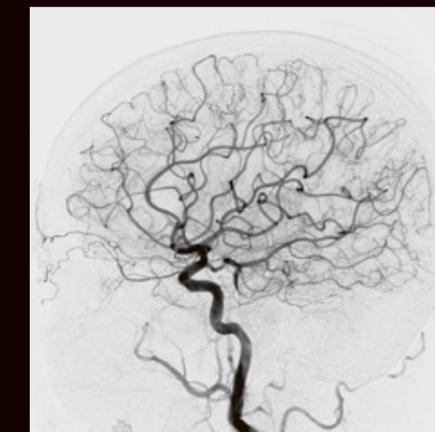

Femoral (CO²)

Even Lower Exposure Dose Levels

The higher image quality offered by SCORE PRO Advance represents another step forward in the advancement of minimally invasive (low dose) procedures. By using an optimal combination of the low-dose mode and low pulse rate, optimized for each examination, Trinias systems can be expected to reduce exposure levels by about 50 % per examination while also providing high image quality.


SCORE RSM

SCORE RSM is an extremely motion-tolerant DSA technique, achieved through Shimadzu's high-speed digital image processing technology. This application is especially effective for tracking vessels across the entire lower extremities, for 3D imaging in combination with C-arm precession and pendulum modes and for examinations on patients who have difficulty holding their breath.

View images from multiple directions with a single imaging session



New Type of DSA Unaffected by Breathing Movements and Intestinal Gas

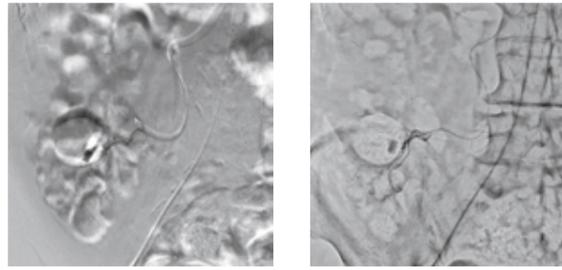

Normal DSA



SCORE RSM

SCORE Chase OPTION Improves Visibility of Entire Lower Extremities Area

Shimadzu SCORE Chase enables free panning longitudinally or laterally during acquisition to trace blood flow through blood vessels. After acquisition, SCORE Chase instantly creates an automatic positionally corrected stitched image and displays it on the monitor so that the overall blood flow through blood vessels in the lower extremities can be easily determined.

Display of Radiation area without fluoroscopy

In conjunction with the patient table top position and FOV, it is possible to display the current radiation area in real time on the long-view image without fluoroscopy. This is useful for radiation reduction and smooth examination workflow.

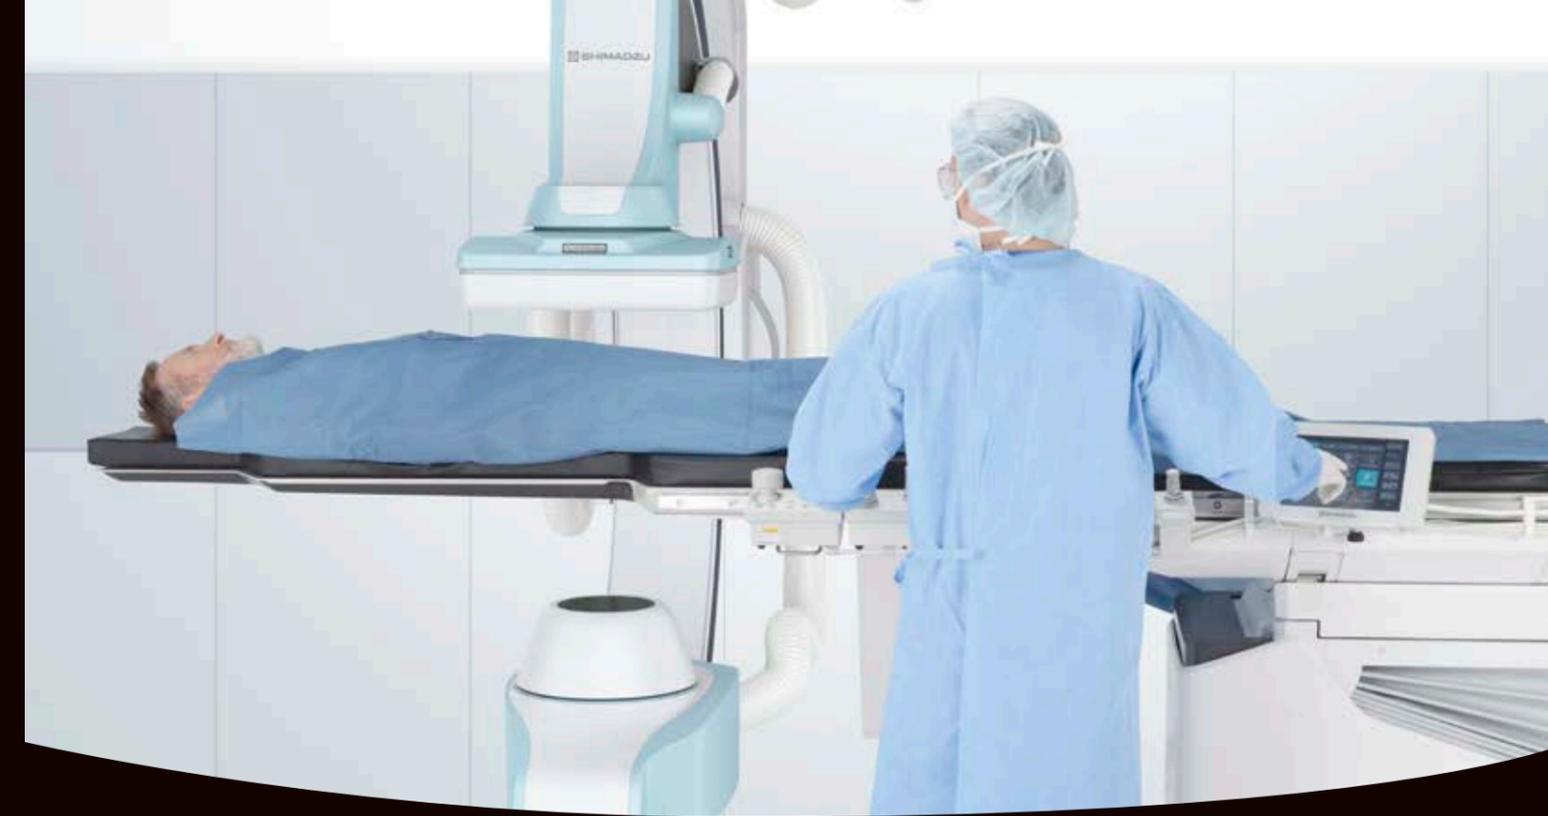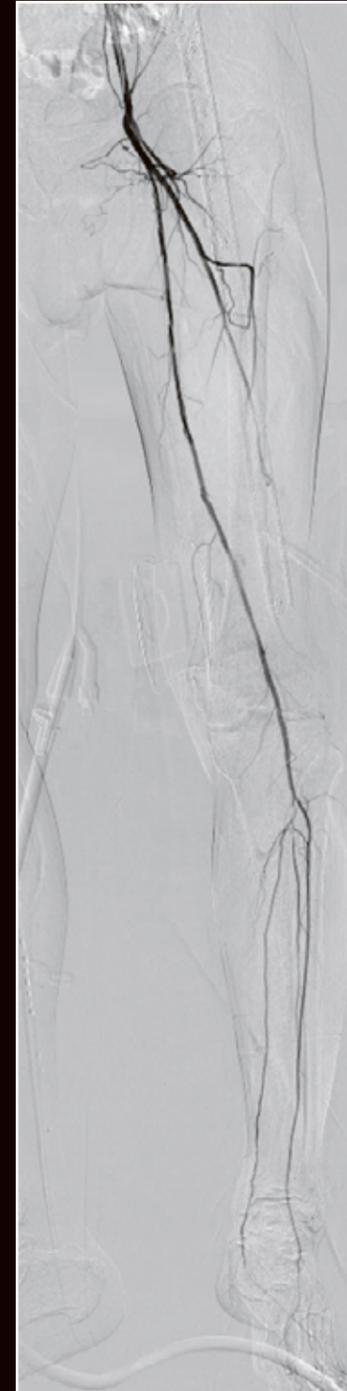

ChaseMAP* produces roadmap without re-acquiring contrast phase

Since the long-view image acquired via SCORE Chase is used as the contrast phase, it is only necessary to acquire a MASK phase image at region off interest in order to produce a roadmap. Utilizing this function effectively leads to a reduction of contrast medium and dose.

Linking Images to the Catheterization Table*

When used in combination with a multifunctional catheterization table, SMART Table, stitched images are linked to the table position, so that the SMART Table is automatically repositioned based on the region of interest during magnification or panning within that image.

Minimally invasive procedures of the lower extremities are supported by moving to the region of interest more smoothly and rapidly.

*This function is available only with SMART Table option


SCORE MAP

Trinias includes a wide variety of roadmap functions that can be selected based on the body area, procedure, and technique in interventional procedures.

Because MAP image settings are kept associated with images even after changing the field of view or magnifying the image or after switching to the frontal or lateral views, MAP functionality can be used without repeating exposures for MAP purposes.

TraceMAP

The TraceMAP function significantly improves the visibility of wires and devices by automatically overlaying an outline of vascular walls isolated from DSA images onto fluoroscopic images. It can be used for aortic stent grafts and supports the endovascular treatment (EVT) of arteries in the lower extremities.



Automatic Trace



TraceMAP at ROI

Sketch function

This function enables easily drawing guide lines manually on fluoroscopic images.



Sketch function

FluoroMAP

This applies a subtraction process to the current fluoroscopic image and uses the resulting image of blood vessels as a MAP image. Because it does not require any additional exposures for the MAP function, it results in reducing the contrast media and exposure levels used. Either a without-bone or with-bone display mode can be selected.

BlankMAP


This function displays the blank frame with only the subsequent changes enhanced. It can be used for coil or liquid embolization of tumors in the head region, for example.

DSA-MAP

The DSA-MAP function displays DSA images overlaid on fluoroscopic images. Either a without-bone display mode, used for areas such as the head, or a with-bone display mode that retains the bones for use as a reference can be selected.



DSA-MAP




DSA-MAP



Flex-APS ~Advanced real-time pixel shift for DSA~


Flex-APS saves time by automatically adjusting three-dimensional misregistration caused by all body movements, including twist motion, providing enhanced DSA imaging.

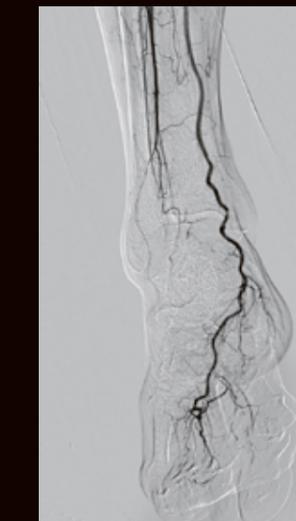

Flex-APS off



Motion Vector

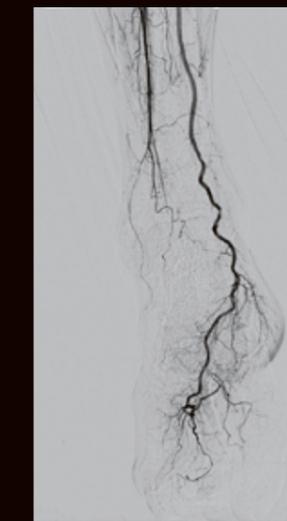


Flex-APS on

SCORE 3D OPTION

The SCORE 3D application allows the rapid display of the 3D reconstructed images automatically after rotational radiography. With a top rotational image acquisition speed of 60 degrees per second, the shorter contrast medium injection time reduces the burden on patients while suppressing the impact of movements on the images and ensuring high image quality. In addition, operability has been improved significantly thanks to easy GUI customization via the pallet function.

High Image Quality 3D Angiography

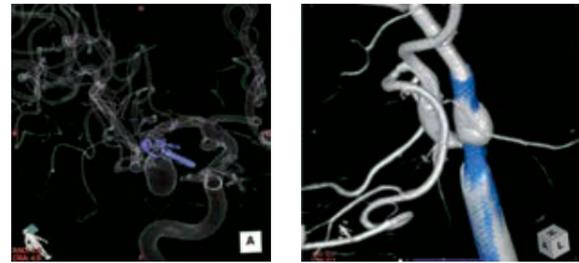

Confirmation of aneurysm after clipping

Confirm of stent deployment pre and post CAS(Multi-Data Fusion)

Palette Function


User-customizable user interface



SCORE CT OPTION

SCORE CT is an application for observing cross-sectional images of low-contrast regions, primarily tumor stains, during procedures. The application has two use modes, depending on the procedure and radiographic region of interest: a 10-second mode (20 degrees/second rotation) and a 20-second mode (10 degrees/second rotation). Axial, coronal, and sagittal images are displayed automatically after radiography.


High Image Quality C-Arm CT

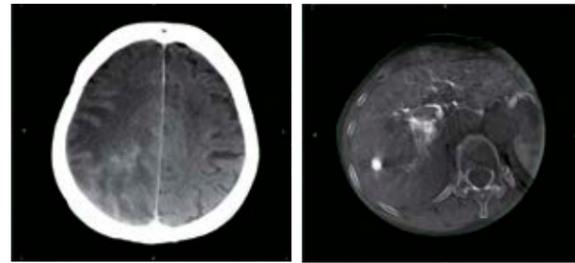

Confirm intracranial hemorrhages using post procedure C-arm CT.

Clearly renders low-contrast areas during TACE procedures.

High-Resolution C-Arm CT (CT-HR)

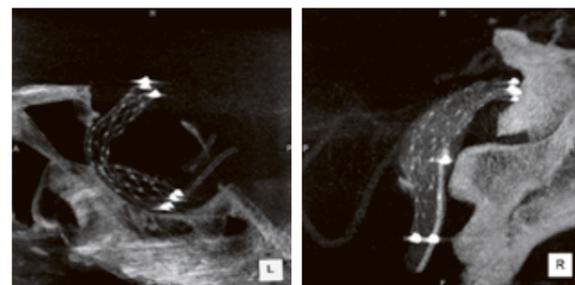

High-definition mode clearly renders intracranial stents.




SCORE Navi OPTION / Navi+Plus OPTION

SCORE Navi/Navi+Plus is an application that utilizes preprocedural images to support minimally invasive interventions. By synchronizing the C-arm projections to pre-procedure MDCT images, the system enables these MDCT images to be used as a reference during interventions, reducing contrast media usage and X-ray dose. Automatic registration of the MDCT images with live fluoroscopy images is easily achieved. With the MDCT image overlaying the live fluoroscopy it allows you to adjust the rate of blending. The Navi+Plus application also includes a virtual stent feature that allows you to simulate the stent size and placement position before carrying out a procedure.


Bi-directional angle linkage between C-arm and MDCT image

Reference CT image tracks C-arm movement.

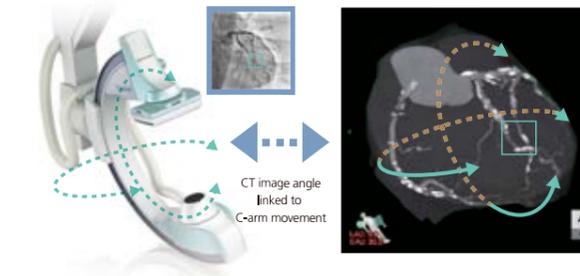

Wide-Area CT Plus Fluoroscopy Display


Supporting additional dose reduction by reducing the fluoroscopy aperture.

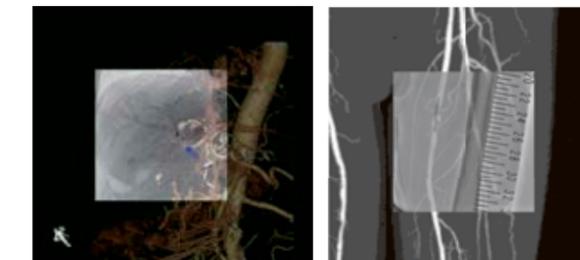

SCORE Navi+Plus


Virtual Stent

Simulates optimal stent size.




Fusion with MDCT image

Superimposed display between preprocedural MDCT image and fluoroscopy image.




Color identification of lesion status

Using the CT value, the state of the lesion is displayed using color mapping.



Extender Function


Automatically renders feeders to the tumor stain.



SCORE Navi

3D Road Map

Overlays a transparent image on a fluoroscopy image.



MPR Road Map

Overlay any cross section image on fluoroscopy image.



*SCORE Navi+plus includes all the function of SCORE Navi



SCORE StentView OPTION

SCORE StentView is the latest, advanced version of StentView, considered truly revolutionary by many clinical users, allowing you to enhance stents and adjust the position in dynamic images in real time. The function for specifying the region of interest (ROI) now allows multiple markers to be used for automatic detection, which contributes to higher detection efficiency and shorter examination times.




Stent overlap

Post balloon

Regions of Interest Can Be Specified

Specifying a region of interest (ROI) improves device detection efficiency, even if multiple devices are present.

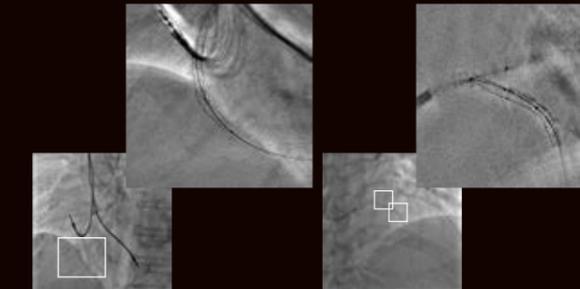

1. Specify regions with an ROI

The automatic recognition only identifies the marker within the ROI, regardless of how many markers are in the field.

2. Specify markers with an ROI

If there are multiple devices, due to bifurcations, identification markers can be specified for each device.

Real-Time Observation Without Looking Away

Simply pressing the [StentView] button and pressing the foot switch automatically displays the StentView image on the live monitor that the operator is watching. Because StentView images can be viewed in real time without looking away from the live monitor, StentView can be used without interrupting the procedure.

SCORE StentShot ~High definitive device visualization~ OPTION

Outstanding stent visualization with SCORE StentShot enhances patients' safety and reduces treatment time. This application provides a static noise free, stent enhanced image, for optimum post-deployment stent visualization.



SCORE StentShot



SMART Design


Changing the way. Making it possible.

SMART Assist

The system has been designed for single-action performance to make system control in the examination room and control room as simple as possible. This improves efficiency during procedures.


C-Arm Controller

The C-arm can be freely controlled using a lever-type Cyber Console.

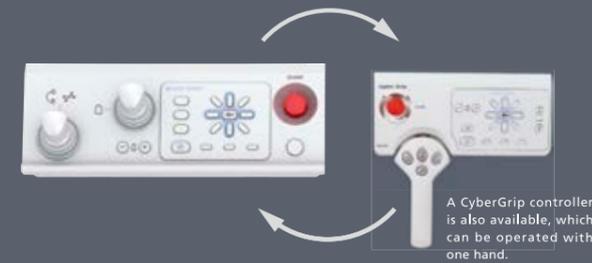

Direct Memory

Registered clinical angles can be called up intuitively using a graphical controller layout.



SMART Access

The ceiling-mounted (C16) is designed to provide a broad operating range. The system layout can be freely configured based on the procedures performed and can flexibly accommodate installing peripheral equipment as well.

Wide Coverage Reduces the Burden on Patients


The ceiling-mounted C-arm is capable of full-body coverage without moving the patient, thanks to 210 cm wide transversal coverage direction and 190 cm longitudinally. Transverse movement, in particular, supports a safe radial catheterization approach.



* Stated length (cm) describes total X-ray imaging range added to C-arm movement, table top movement, and FPD field of view.

16" × 12" FPD

In the 16-inch large field of view FPD, the vertical and horizontal rotations of the FPD can be selectable according to the procedure and application, and a field of view matching the observation site can be secured. Also, by making the size of the FPD cover compact, it is possible to bring the C-arm closer to the patient at a deep angle, thus providing high image quality that can be sufficiently used even in the heart region.

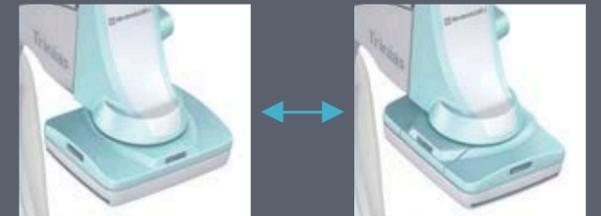

Multifunctional SMART Table Accommodates a Variety of Procedures and Techniques

Smart Table can be configured for approaches based on complicated procedures and techniques in various areas, from cardiovascular and head areas to lower extremities, to accommodate a wide range of imaging.



Smart Table can be operated either manually with the ergonomic mushroom handle or electronically with the table control buttons. Smart Table can also be synchronized to imaging, so that Smart Table is positioned within the region of interest after zooming/panning.



*It can also be combined with regular catheterization tables.

Multifunctional Wireless Foot Switch OPTION

With no cables on the floor, it is easy to route position the foot switch where the operator is standing.



SMART Display OPTION

With the large 58-inch high-resolution color LCD and touch panel controller, the operator can select the optimal display of image data to suit the current procedure.


SMART Touch Provides Smooth Operability

All screen operations are consolidated in one place on the touch panel, including those for changing the fluoroscopy/radiography program required during surgical procedures, switching between a wide variety of functionality, and selecting images. By making operations easier to understand and intuitive, it supports a more sophisticated use of surgical procedures and techniques.



Dynamic Reference

Reference images can be changed, replayed, or paused during fluoroscopy. Moving images from before and after surgical procedures can be compared and replayed.

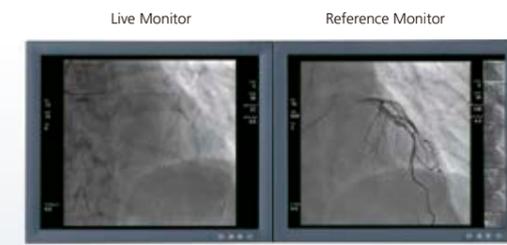

Changes, plays back, and freezes reference images during fluoroscopy. A thumbnail function enables immediate display of reference images.

Parallel Processing Achieves Efficient Workflow

A multiprocessor enables parallel image processing during examinations providing an efficient workflow.




SMILE Concept

Safety + Comfort = SMILE

Patient-Friendly Clean Design

The color design creates a slim form and clean look.

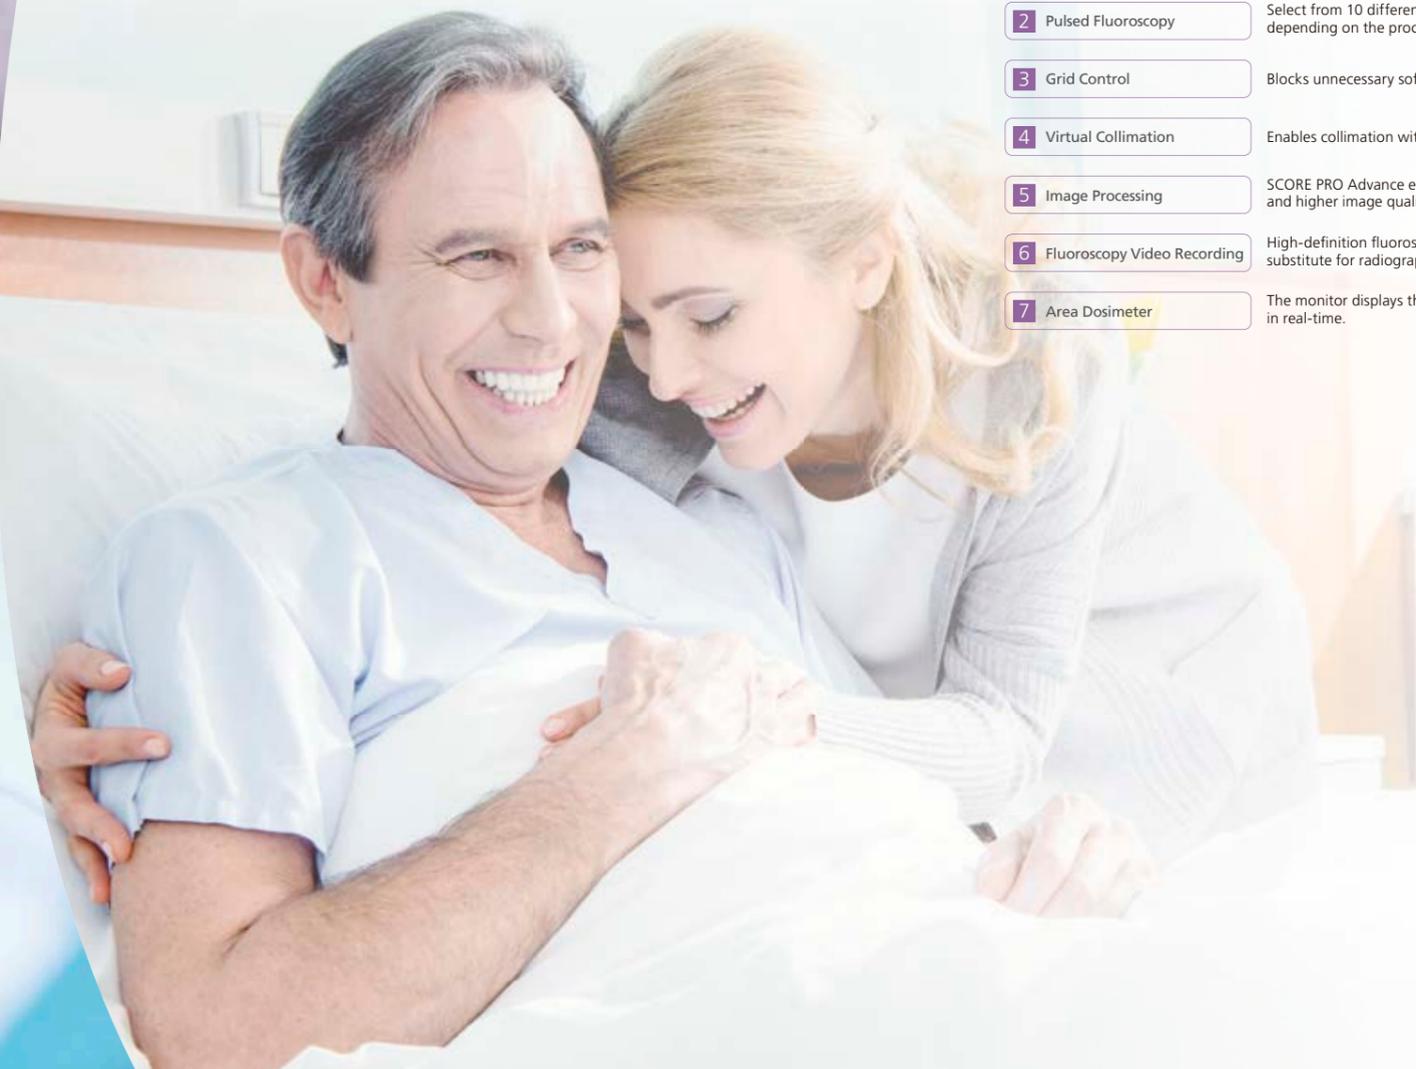

SMILE Dose-eye

■ Seven Features That Reduce Exposure

SMILE Dose-eye achieves an excellent system-wide optimization between lower dose and high image quality.

- 1 MBH Filter Effectively eliminates unnecessary soft X-rays.
- 2 Pulsed Fluoroscopy Select from 10 different rates depending on the procedure.
- 3 Grid Control Blocks unnecessary soft radiation.
- 4 Virtual Collimation Enables collimation without fluoroscopy.
- 5 Image Processing SCORE PRO Advance ensures lower dose and higher image quality.
- 6 Fluoroscopy Video Recording High-definition fluoroscopy can substitute for radiography.
- 7 Area Dosimeter The monitor displays the actual dosage in real-time.

SMILE Recovery

■ High-Speed Setup

All functions are available within two minutes after the power is turned ON.




■ Data Mirroring

The mirroring architecture provides data storage redundancy.

■ Backup Filament

If a filament burns out during an examination, the other filament will be automatically selected so the examination can be continued.

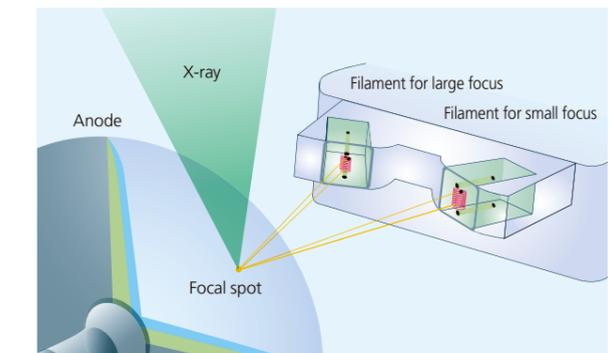

Even More Worry-Free and Reliable Japanese Quality for Interventional Procedures


All Processes, From Production to Quality Control and Shipping, Performed Within Shimadzu

Shimadzu manufactures Trinius products at Shimadzu's own advanced technology plant, where all processes from production to quality control and shipping are performed within the Shimadzu facility to ensure Trinius products are delivered with the highest quality.



Advanced Quality Center Ensures High Quality

Within the Shimadzu facility, Shimadzu has built a Quality Center that is equipped with state-of-the-art equipment for various evaluation and analysis necessary to ensure that only the highest quality products are delivered. The Quality Center is also used for product development, quality assurance, and to ensure compliance with various regulations and standards.

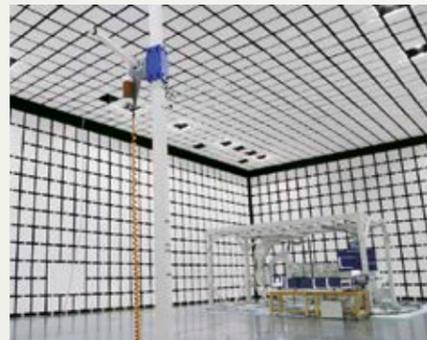

Proactive Service Support Program

Periodic Maintenance

- Our professional service experts visit periodically and inspect the system.
- Mechanical, electrical and safety checks are performed. Calibration is carried out whenever necessary to ensure optimal system performance.

Emergency Service Support


- Shimadzu local service centers ensure rapid response times.
- On-call support is available for your emergency needs.

Parts Warranty Program

- A selection of parts warranty programs is available for you selection to manage your service needs and plan your running costs.

Remote Maintenance Service

- The Shimadzu "Site-View" provides you with remote maintenance service.
- In the event of possible system errors, the Site-View automatically generates an alert message for proactive service support by our field service engineers.
 - Remote maintenance team will support your Trinius system with Shimadzu "Site-View" care programs.
 - Our system experts periodically analyse system log files through Site-View.

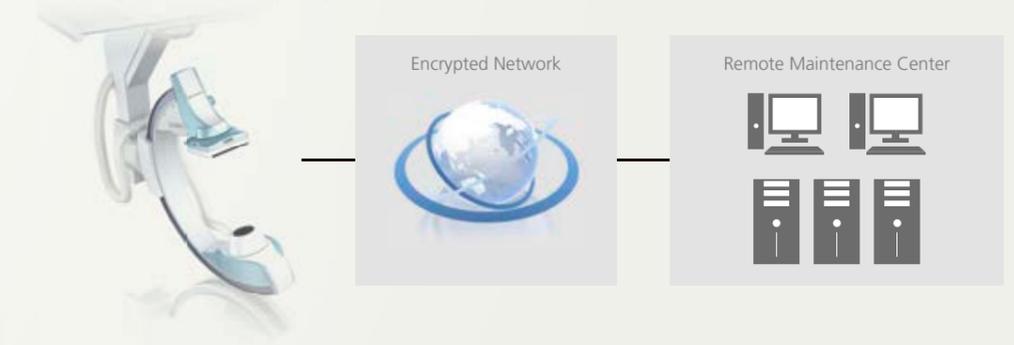

Founded in 1875, Shimadzu Corporation, a leader in the development of advanced technologies, has a distinguished history of innovation built on the foundation of contributing to society through science and technology. We maintain a global network of sales, service, technical support and applications centers on six continents, and have established long-term relationships with a host of highly trained distributors located in over 100 countries. For information about Shimadzu, and to contact your local office, please visit our website at www.shimadzu.com



Shimadzu Corporation

Headquarters

1, Nishinokyo-Kuwabara-cho, Nakagyo-ku, Kyoto 604-8511, Japan
<https://www.shimadzu.com/med/>



Shimadzu Corporation Medical Systems Division has been certified by TÜV Rheinland as a manufacturer of medical systems in compliance with ISO9001:2015 Quality Management Systems and ISO13485:2016 Medical Devices Quality Management Systems.

Remarks:

- Every value in this catalogue is a standard value, and it may vary a little from the actual at each site.
- The appearances and specifications are subject to change for reasons of improvement without notice.
- Items and components in the photos may include optional items. Please confirm with your sales representative for details.
- Certain configurations may not be available pending regulatory clearance. Contact your Shimadzu representative for information on specific configurations.
- Before operating this system, you should first thoroughly review the Instruction Manual.